

BDS Blackout Dock Shelter

Product Specifications



PROJECT INFORMATION

GENERAL CONTRACTOR __


JOB NAME _

DISTRIBUTOR_
QUANTITY____

DESIGN HIGHLIGHTS

- Exclusive DryDock® S-900DD Integral Rain Header protects dock from moisture infiltration with a highly resilient foam core and automatic positioning
- Exclusive Hinge Guard™ effectively seals hinge gap along opened trailer doors, is made of High Molecular Weight Polyethylene (HMWPE), and attached securely with industrial hook and loop for easy replacement
- Exclusive LightBlockr™ connector curtain blocks air and light infiltration at overlap of side and head curtains.
- Exclusive roll-formed galvanized steel framing
- Head curtain wear pleats and bottom wear panels with exclusive UHWR™ (Ultra High Wear Resistant) fabric
- Canopy style rigid head frame increases structural integrity while translucent head member allows operating light
- Impactable foam-filled side members
- Raked header for moisture run-off

APPLICATION	DATA		
Door width:	ft	in.	
Door height:	ft	in.	
Dock height:	ft	in.	
	per projection	and any buildi	ng wall/foundation offset or cantileve
TRUCKS AND			
Width:			
Height:			
Length:			5
Hydraulic tailga			Rear step section: ☐ Yes ☐ No Yard jockeys: ☐ Yes ☐ No
Tailgate/step se	ection size:	IN	rard jockeys: Tes No
CERTIFIED FO	R CONSTRUC	CTION	
BY			
COMPANY			

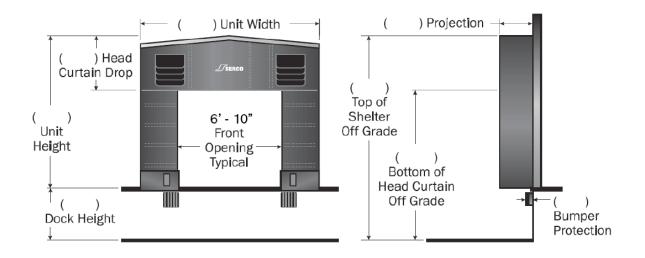

Quantity	Drive Approach: Level		☐ Incline	☐ Decline	□	_% of grade		
Building Wall Structur	e: 🗌 Metal	☐ Other						
Unit Width: 🗌 11'6"	□ 11'7"	□ 11'10"	□ 12'2"					
Unit Height: 🗌 11'	☐ 11'6"	☐ 12' ☐ 1:	2'6"					
Head Member Style:	☐ Raked	☐ Flat						
Curtain Material:	☐ 40 oz. vinyl standard ☐ XL-100							
Color:	Black only							
Head Curtain Drop:	□ 30"	□ 36" □ 42"	□ 48"	□ 54" ["			
Taper: ☐ Yes ☐	No							
Top Projection: " (23"- 42")								
Bottom Projection: \Box		" (23"- 42")						
Options: ☐ Door numbers ☐ Full length guide stripes								

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Serco

1612 Hutton Drive, Suite 140 Carrollton, TX 75006 800.933.4834 www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Servo as word and logo are registered demarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

^{*}Note: Consult factory for blockout application assistance.

^{*}Conversions: To convert measurements to metric, see formulas below: