

BDS Blackout Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

- Exclusive DryDock® S-900DD Integral Rain Header protects dock from moisture infiltration with a highly resilient foam core and automatic positioning
- Exclusive Hinge Guard™ effectively seals hinge gap along opened trailer doors, is made of High Molecular Weight Polyethylene (HMWPE), and attached securely with industrial hook and loop for easy replacement
- Exclusive LightBlockr™ connector curtain blocks air and light infiltration at overlap of side and head curtains.
- Exclusive roll-formed galvanized steel framing
- Head curtain wear pleats and bottom wear panels with exclusive UHWR™ (Ultra High Wear Resistant) fabric
- Canopy style rigid head frame increases structural integrity while translucent head member allows operating light
- Impactable foam-filled side members
- Raked header for moisture run-off
- Foam filled draft pads

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No

Rear step section: Yes No

Tailgate/step section size: _____ in

Yard jockeys: Yes No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

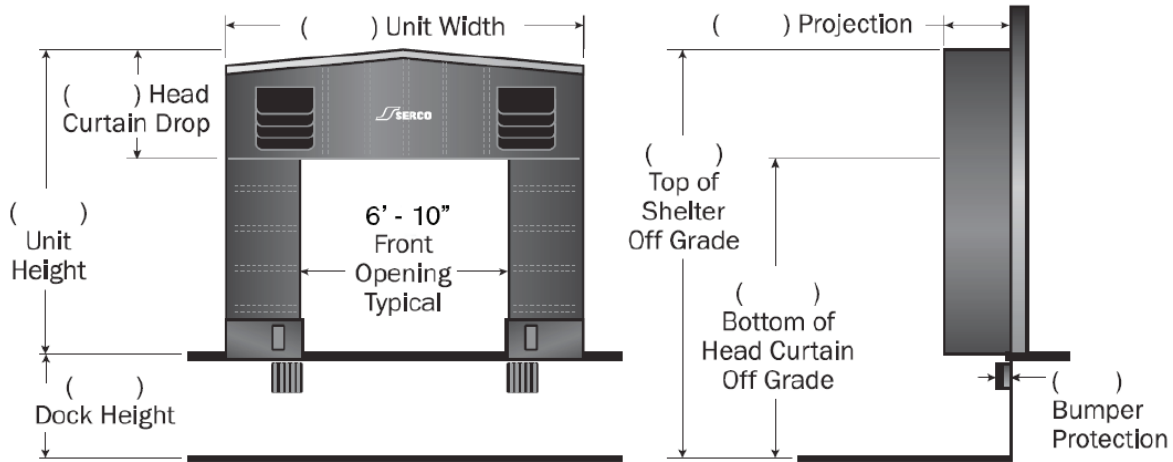

Quantity _____ Drive Approach: Level Incline Decline _____ % of grade

Building Wall Structure: Metal Other

Unit Width: 11'6" 11'7" 11'10" 12'2"

Unit Height: 11' 11'6" 12' 12'6"

Head Member Style: Raked Flat

Curtain Material: 40 oz. vinyl standard XL-100

Color: Black only

Head Curtain Drop: 30" 36" 42" 48" 54" _____"

Taper: Yes No

Top Projection: _____" (23" - 42")

Bottom Projection: _____" (23" - 42")

Options: Door numbers Full length guide stripes

*Note: Consult factory for blackout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Serco
 1612 Hutton Drive, Suite 140
 Carrollton, TX 75006
 800.933.4834
 www.sercodockproducts.com