

Ultra Seal Foam Dock Seal with Head Pad

Product Specifications



DESIGN HIGHLIGHTS

- Unique Ultra Seal® side pad design provides improved trailer access and minimizes building wall pressure
- Internal retention strap system secures fabric to the inside of the side pad profile minimizing the possibility of pad damage
- Seals the hinge air gap on trailers with swing out doors
- Dual guide stripes for 96" and 102" wide trailers
- Bottom of side pad is reinforced to extend seal life
- Can be mounted on doors up to 10' wide and 9' high
- Includes roll formed galvanized steel side and head pad backing
- Optional wear pleats are available to extend the service life of the dock seal
- Available in a wide variety of fabrics and colors

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: ☐ Yes ☐ No

Tailgate/step section size: _____ in

Rear step section: ☐ Yes ☐ No

Yard jockeys: ☐ Yes ☐ No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

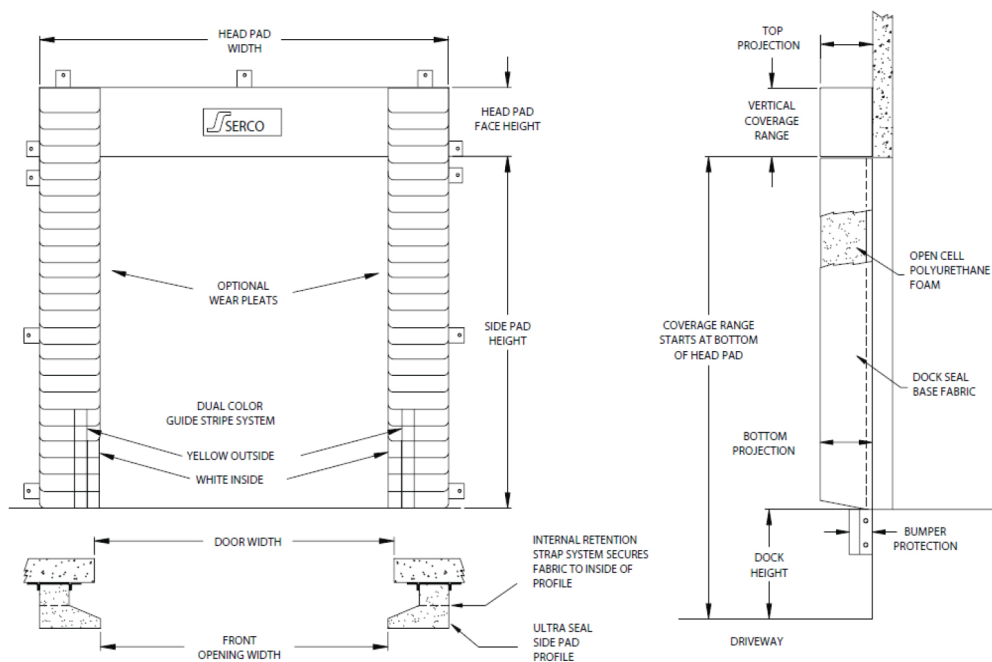

Quantity _____ Head Pad Width: _____ ☐ Guardian head pad

Head Pad Back/Face: ☐ 12/12 ☐ 18/18 ☐ 12/15 ☐ 12/18 ☐ 24/24

Drop Curtain: ☐ None ☐ 12" ☐ 18" ☐ 24" ☐ Hook-Loop ☐ No hook-loop ☐ Full width

Side Pad Height: _____ "

Side Pad Back/Face: ☐ 6/14 ☐ 8/15 ☐ 10/18 ☐ 8/21

Base Material ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Taper: ☐ Tapered ☐ Non-Tapered

Top Projection: ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ _____ "

Bottom Projection: ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ _____ "

Blockout: ☐ None Blockout Projection: ☐ 2" ☐ 4" ☐ 6" ☐ 8" ☐ 10" ☐ 12" ☐ _____ "

Wear Pleats: ☐ None ☐ 4" ☐ 8" ☐ 16" ☐ Head and side pads ☐ Head pad corners

Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Wear Face: ☐ None ☐ Head pad ☐ Side pad

Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Reinforced Inside Face: ☐ Standard ☐ Side pad full height

Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Bottom Flap Size: ☐ 3" ☐ 6" ☐ _____ " Bottom Flap Location: ☐ Inside ☐ Inside front ☐ All side

Options: ☐ Door numbers ☐ Flame retardant foam ☐ Flame retardant fabric ☐ 24" Guide stripes

Side Pad Mounting Brackets: ☐ Flats & angles ☐ Angles ☐ 1 1/2" Offsets & angles

*Note: Consult factory for blockout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x .254 = millimeters (Example: 4" x .254 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Serco
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.933.4834
www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Serco as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLOY. All rights reserved. Part of ASSA ABLOY. Printed in USA. Form # SPS-SES1-0121