

# S 2500 Guardian Dock Seal

## Product Specifications



### DESIGN HIGHLIGHTS

- Two-piece head pad system with sliding front pad increases wearability
- Roll-formed galvanized steel framing reduces pressure on building wall
- Full width durable head pad wear face included on the mobile head pad portion
- Head pad mounted firmly to steel framing with tek screws inserted through heavy-duty washers
- 4" exposure wear pleating moves with trailer, extending fabric life in key wear areas
- Reinforced tek screws provide firm attachment of the sliding wear pleat system to side pads
- Sliding wear pleat system and front head pad are easily replaced without dock seal removal
- Strong urethane-coated base material provides good sliding surface for mobility of wear surfaces

### APPLICATION DATA

Door width: \_\_\_\_\_ ft. \_\_\_\_\_ in.      Door height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Dock height: \_\_\_\_\_ ft. \_\_\_\_\_ in.      Bumper protection\*: \_\_\_\_\_ in.  
 (\*Includes bumper projection and any building wall/foundation offset or cantilever)

### PROJECT INFORMATION



JOB NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 GENERAL CONTRACTOR \_\_\_\_\_  
 DISTRIBUTOR \_\_\_\_\_  
 QUANTITY \_\_\_\_\_

### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min. \_\_\_\_\_  
 Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min. \_\_\_\_\_  
 Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min. \_\_\_\_\_  
 Hydraulic tailgate: ☐ Yes ☐ No      Rear step section: ☐ Yes ☐ No  
 Tailgate/step section size: \_\_\_\_\_ in      Yard jockeys: ☐ Yes ☐ No

### CERTIFIED FOR CONSTRUCTION

BY \_\_\_\_\_  
 COMPANY \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 DATE \_\_\_\_\_

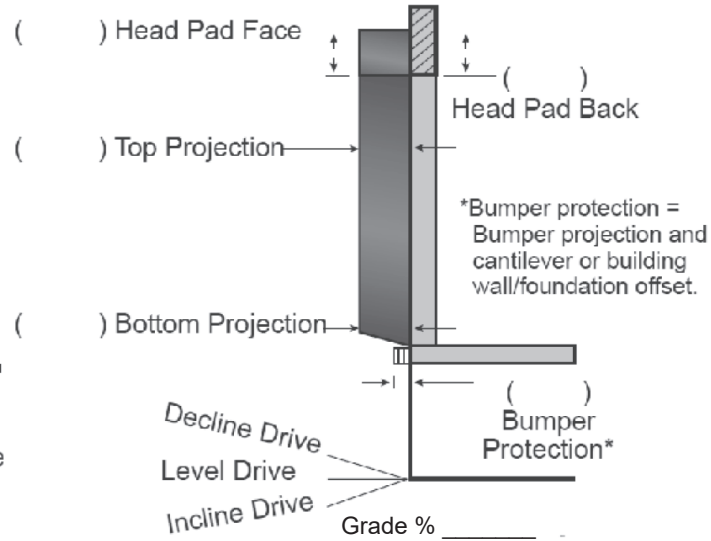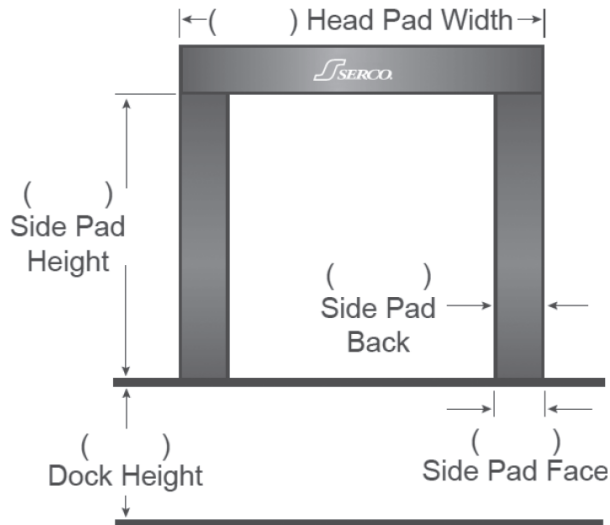

Quantity \_\_\_\_\_

**Head Pad Width:** \_\_\_\_\_ (Total inches) **Side Pad Height:** \_\_\_\_\_ (Total inches)

**Side Pad Bevel:** ☐ 12/12 ☐ 6/10 ☐ 8/12 ☐ 10/12 ☐ 10/15 ☐ 8/15 ☐ 12/15 ☐ 10/18 ☐ 6/14

**Head Pad Bevel:** ☐ 12/12 ☐ 18/18 ☐ 12/15 ☐ 12/18

**Drop Curtain:** ☐ None ☐ 12" ☐ Hook-loop

**Base Material:** 25 oz. black urethane

**Taper:** ☐ Tapered ☐ Non-Tapered

**Top Projection:** ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ 22"

**Bottom Projection:** ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ 22"

**Bottom Flaps:** 3" Inside bottom flaps are standard

☐ 6" ☐ Inside ☐ Inside and Front ☐ All 3 Sides

**Blockout:** ☐ None ☐ Top projection \_\_\_\_\_" ☐ Bottom projection \_\_\_\_\_"

**Wear Surface:** Full width black XL-100 wear face is standard on the head pad

☐ Reinforced Inside Face is standard on the side pads and head pad corners

**Options:** ☐ Door numbers (Specify)

**Side Pad Mounting Brackets:** ☐ None ☐ Flats & angles ☐ Angles ☐ 1 1/2" Offsets & Angles

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



**Serco**

1612 Hutton Drive, Suite 140

Carrollton, TX 75006

800.933.4834

www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Serco as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. Form # SPS-SG25-0925