

S3000HL L-PAD Foam Dock Seal with Head Curtain

Product Specifications



DESIGN HIGHLIGHTS

- Provides positive seal between internal and external environments
- Endurance-tested foam core is continuously bonded to frame surface with flexible, non-flammable adhesive
- Top of hood is tapered forward and supported with thick wall aluminum pipe
- Hood curtain splits offer load relief and higher clearance
- Highly resilient, open-celled polyurethane foam compresses easily to extend seal life
- Roll-formed galvanized steel framing reduces pressure on building wall
- L-shaped sides compress around side of trailer to create a seal providing full width trailer access
- All pads are vented for air and moisture release
- Full length yellow stripes guide
- Heavy-duty, galvanized steel mounting brackets included

CERTIFIED FOR CONSTRUCTION

BY _____
 COMPANY _____
 ADDRESS _____
 DATE _____

APPLICATION DATA

Door width: _____ ft. _____ in.
 Door height: _____ ft. _____ in.
 Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.


Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No Rear step section: Yes No

Tailgate/step section size: _____ in Yard jockeys: Yes No

PROJECT INFORMATION

JOB NAME _____
 ADDRESS _____
 GENERAL CONTRACTOR _____
 DISTRIBUTOR _____
 QUANTITY _____

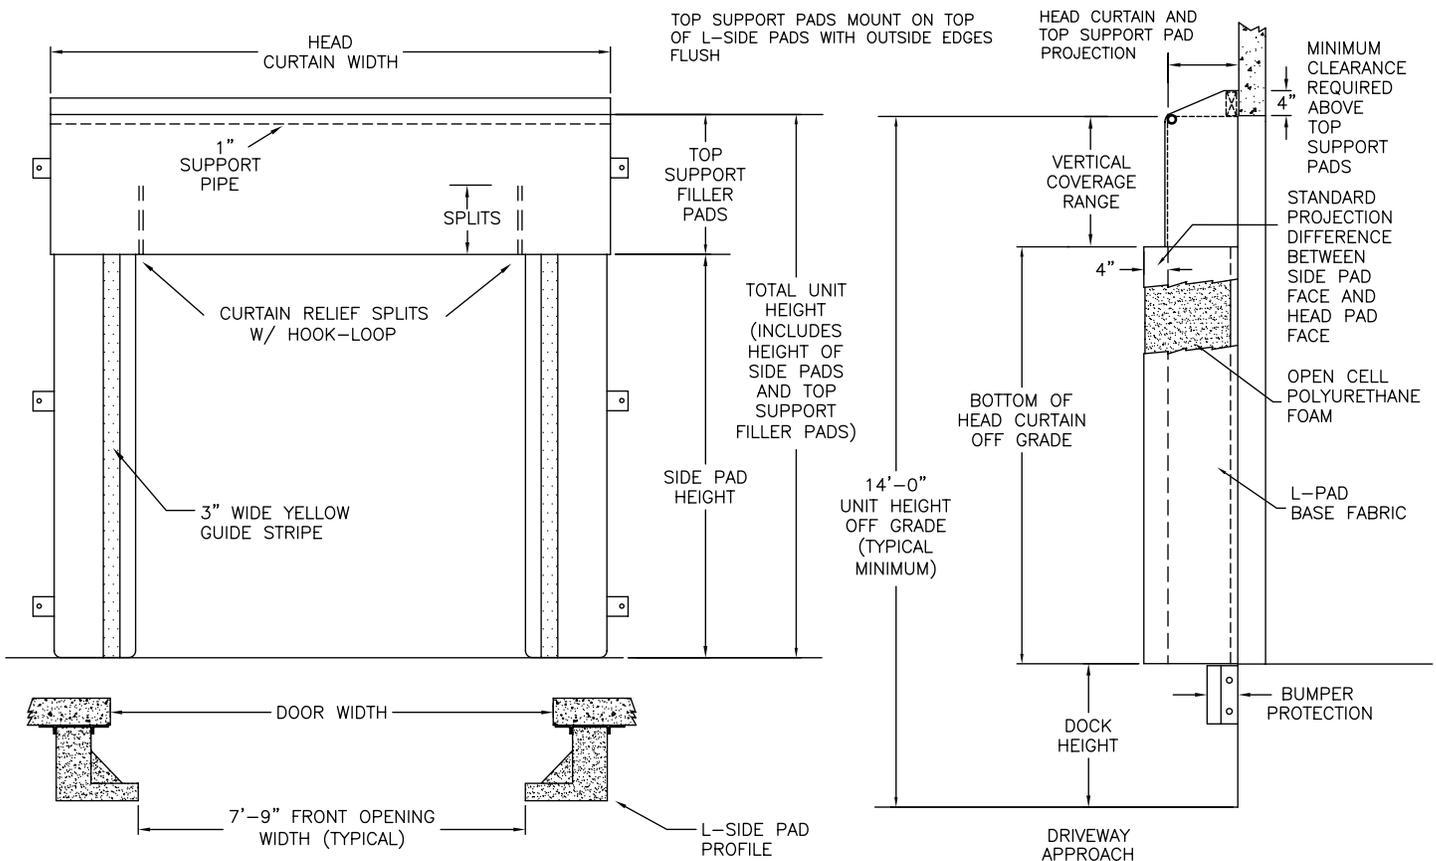

- Quantity _____ Framing: Roll formed galvanized steel
- Head Curtain Width:** 129" for 9'6" door widths or smaller 135" for 9'7" to 10'0" door widths
- Head Curtain Drop:** 18" 24" 30" 36" 42" 48" _____"
- Head Curtain Splits:** 18" 24" 30" 36" No split
- Head Curtain Options:** None Pull rope assembly O-Rings 2" Foam front Sectional foam front
- Total Unit Height:** _____
- Side Pad Face:** 18" for 9'6" door widths or smaller 21" for 9'7" to 10'0" door widths
- Base Material:** 22 oz. vinyl 40 oz. vinyl 16 oz. CSM 40 oz. CSM XL-100
- Color:** Black Tan Brown Blue Green
- Taper:** Tapered Non-Tapered
- Top Projection:** 16" 18" 20" 22" 24" _____"
- Bottom Projection:** 16" 18" 20" 22" 24" _____"
- Blockout:** None Top projection _____" Bottom projection _____"
- Blockout Projection:** 2" 4" 6" 8" 10" 12" _____"
- Wear Face:** None Hood Side pad Tip of "L" (XL-100)
- Material:** 22 oz. vinyl 40 oz. vinyl 40 oz. CSM XL-100
- Color:** Black Tan Brown Blue Green
- Wear Pleats:** None 4" WP8 WP16 Side pads Head pad corners
- Material:** 22 oz. vinyl 40 oz. vinyl 40 oz. CSM XL-100
- Color:** Black Tan Brown Blue Green
- Options:** Door numbers Flame retardant foam Flame retardant fabric only
- Mounting Brackets:** None Flats & angles Angles 1 1/2" Offsets & angles

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

*Note: Consult factory for blockout application assistance

*Note: Not all options are available with all models



Serco
 1612 Hutton Drive, Suite 140
 Carrollton, TX 75006
 800.933.4834
 www.sercockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Serco as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.