

Ironside™ Dock Seal with Head Pad

Product Specifications



DESIGN HIGHLIGHTS

- Exclusive UHWR™ (Ultra High Wear Resistant) fabric on wear surfaces. Full height on side pads and full width on head pad
- Exclusive Guardian™ head pad helps defend against damage from yard spotters and air ride suspension trailers
- Exclusive roll-formed, galvanized steel framing
- Exclusive heat-sealed, full length, yellow guide stripes
- Endurance tested foam core is continuously bonded to frame surface with flexible, nonflammable adhesive
- Highly resilient, open-celled polyurethane foam keeps original shape and compresses easily to extend the seal life
- Side pad bottoms are tapered to avoid pinching and wear
- All pads are vented for air and moisture release
- Heavy-duty, galvanized steel mounting brackets included

APPLICATION DATA

Door width: _____ ft. _____ in. Door height: _____ ft. _____ in.
 Dock height: _____ ft. _____ in. Bumper protection*: _____ in.
 (*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED



Width: _____ Max. _____ Min.
 Height: _____ Max. _____ Min.
 Length: _____ Max. _____ Min.
 Hydraulic tailgate: ☐ Yes ☐ No Rear step section: ☐ Yes ☐ No
 Tailgate/step section size: _____ in Yard jockeys: ☐ Yes ☐ No

PROJECT INFORMATION

JOB NAME _____
 ADDRESS _____
 GENERAL CONTRACTOR _____
 DISTRIBUTOR _____
 QUANTITY _____

CERTIFIED FOR CONSTRUCTION

BY _____
 COMPANY _____
 ADDRESS _____
 DATE _____

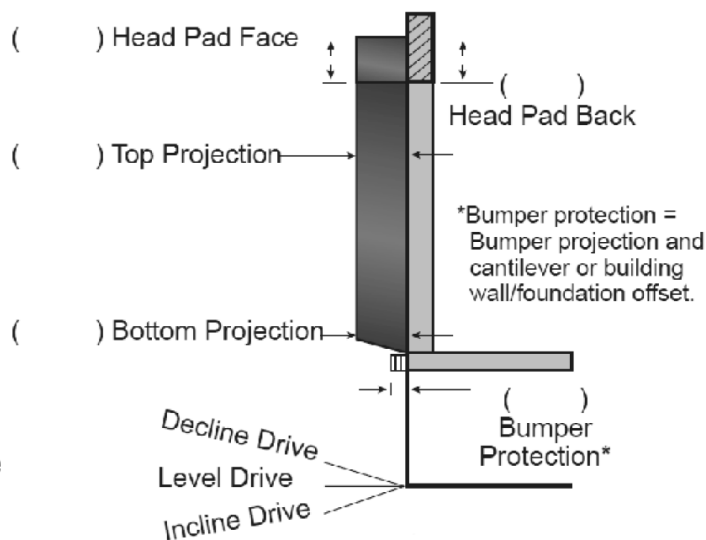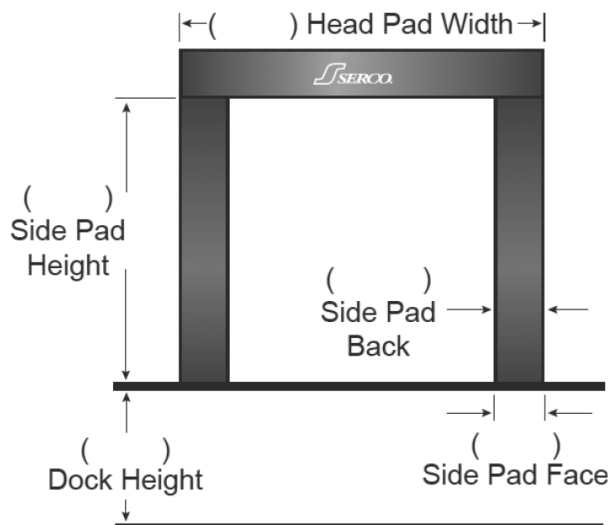

Quantity _____

Guardian® Head Pad Width: _____ (Total inches)

Guardian® Head Pad Back/Face: ☐ 12/12 ☐ 18/18 ☐ 24/24 ☐ 12/15 ☐ 12/18

Drop Curtain: ☐ None ☐ 12" ☐ 18" ☐ 24" ☐ Velcro strips ☐ Full width

Side Pad Height: _____ (Total inches)

Side Pad Back/Face: ☐ 12/12 ☐ 6/10 ☐ 8/12 ☐ 10/12 ☐ 10/15 ☐ 8/15 ☐ 12/15 ☐ 10/18 ☐ 6/14

Base Material: 22 oz. black vinyl standard

Taper: ☐ Tapered ☐ Non-Tapered

Top Projection: ☐ 8" ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ 22" ☐ 24"

Bottom Projection: ☐ 8" ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ 22" ☐ 24"

Bottom Flaps: 3" Inside standard

Blockout: ☐ None ☐ Top projection _____" ☐ Bottom projection _____"

Wear Face: Full height side pad & full width head pad with UHWR fabric standard, black

Reinforced Inside Face: Full height side pad with UHWR fabric standard, black

Options: ☐ Door numbers

Side Pad Mounting Brackets: ☐ None ☐ Flats & angles ☐ Angles ☐ 1 1/2" Offsets & Angles

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Sercodock
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.933.4834
www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Sercodock as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLOY. All rights reserved. Part of ASSA ABLOY. Printed in USA. Form # SPS-SEAHP-0925